


RESISTANCE OPTIONS

#	1%	5%
R1	292.4	300
R2	17.6	18
R3	292.4	300
R4	150.5	150
R5	37.4	39
R6	150.5	150
R7	96.2	100
R8	71.2	68
R9	96.2	100
R10	61.1	62
R11	247.5	240
R12	61.1	62

NOTES:

TWO RESISTANCE VALUES ARE SHOWN. THE 1% VALUES PRODUCE AN INPUT/OUTPUT RESISTANCE VALUE OF 50 +/- 0.1 OHMS. THE 5% RESISTOR VALUES PRODUCE THE FOLLOWING INPUT/OUTPUT RESISTANCE VALUES.

- 3 DB SETTING - 49.2 OHMS
- 6 DB SETTING - 49.9 OHMS
- 10 DB SETTING - 49.5 OHMS
- 20 DB SETTING - 50.5 OHMS

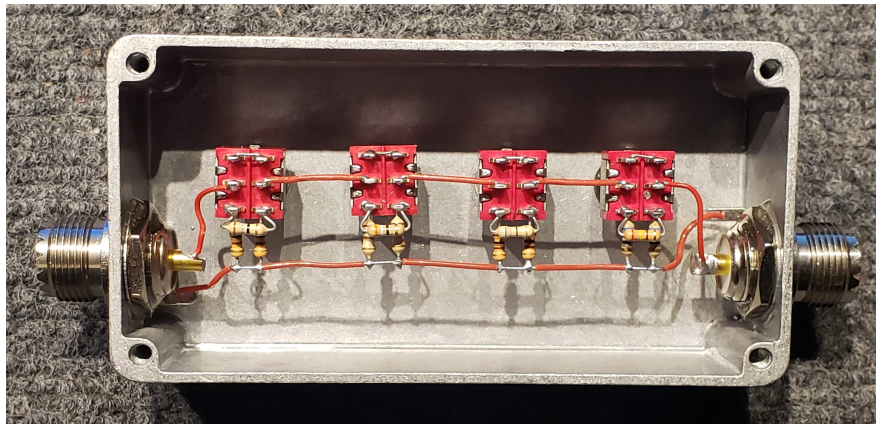

RMBC		
Title		
4 STAGE ATTENUATION DEVICE		
Size	Document Number	Rev
A	PROTOTYPE	0
Date:	Wednesday, April 12, 2023	Sheet 1 of 1